



100-

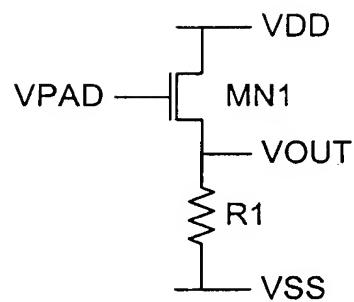


FIG. 1


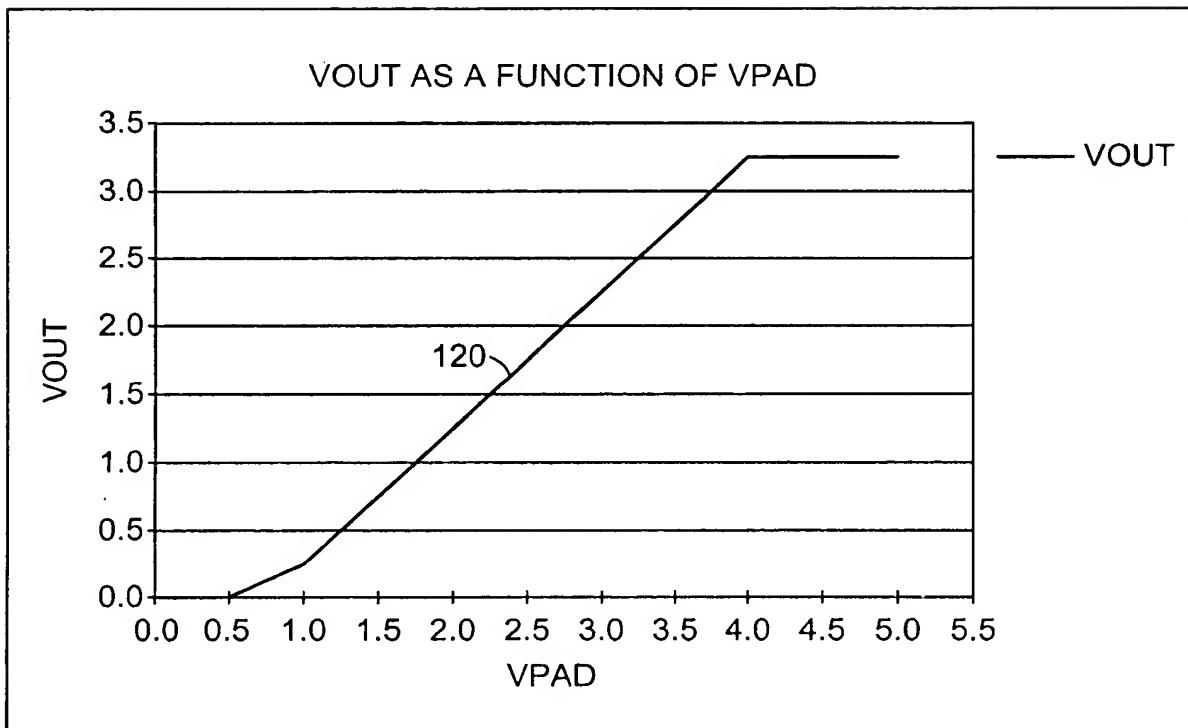


FIG. 2

DROP FROM PAD TO SOURCE (VOUT) AND DRAIN (VDD) OF
INPUT DEVICE ATON DEVICE AND 10MEG RESISTOR**FIG. 3**

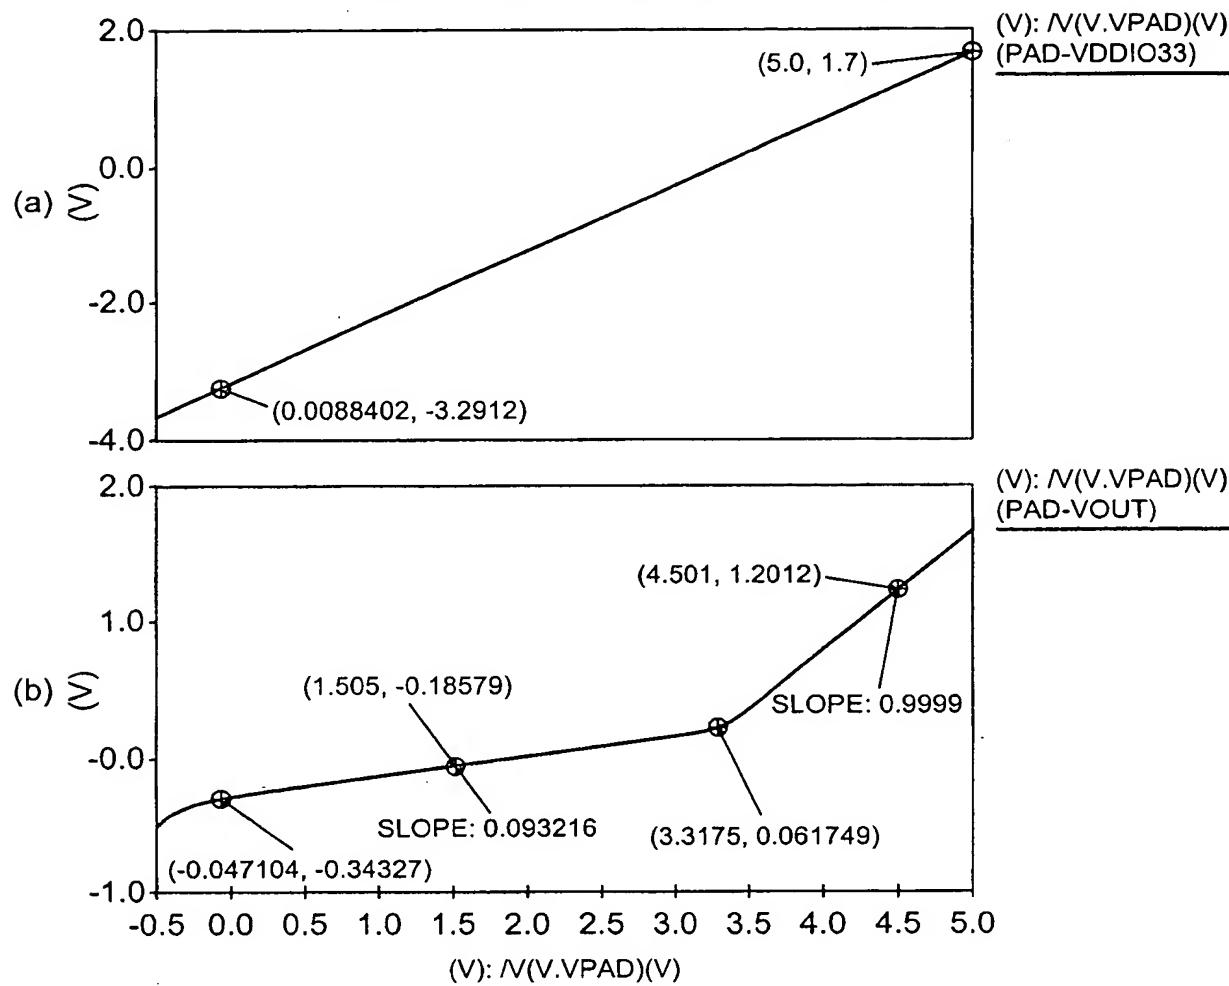

ATD SOURCE FOLLOWER WITH 10MEG RESISTOR

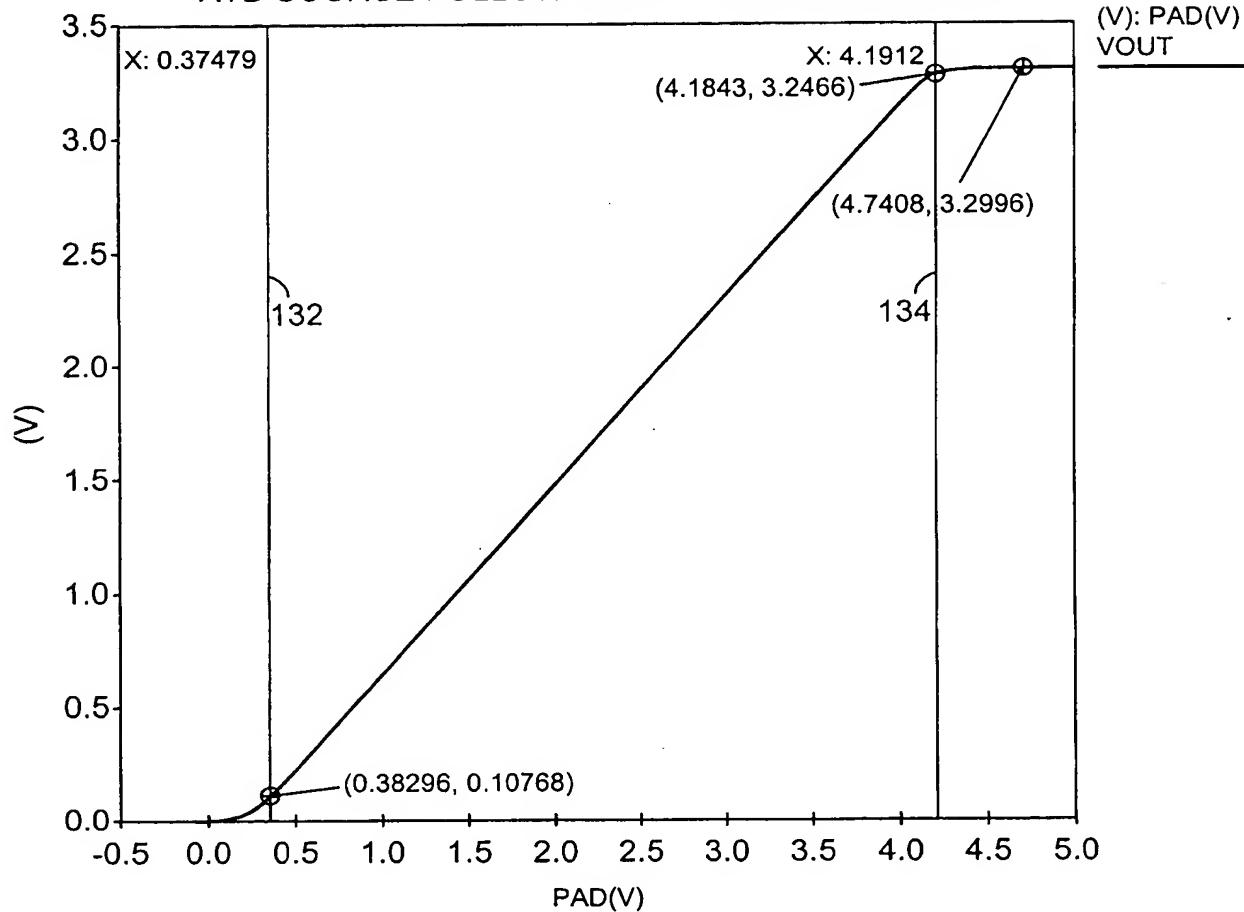


FIG. 4

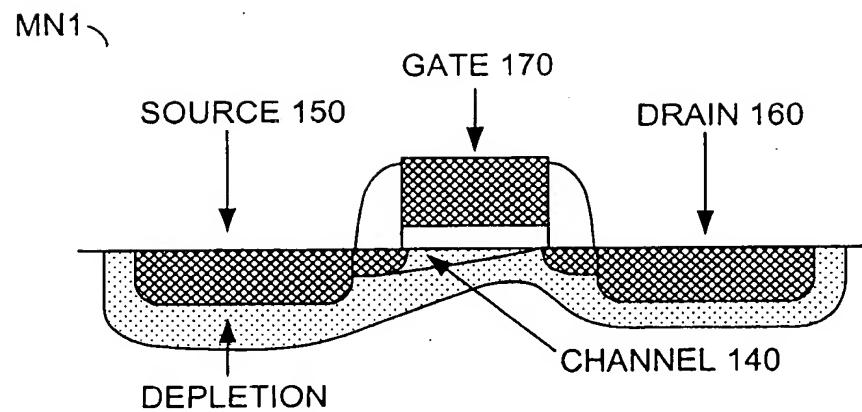


FIG. 5

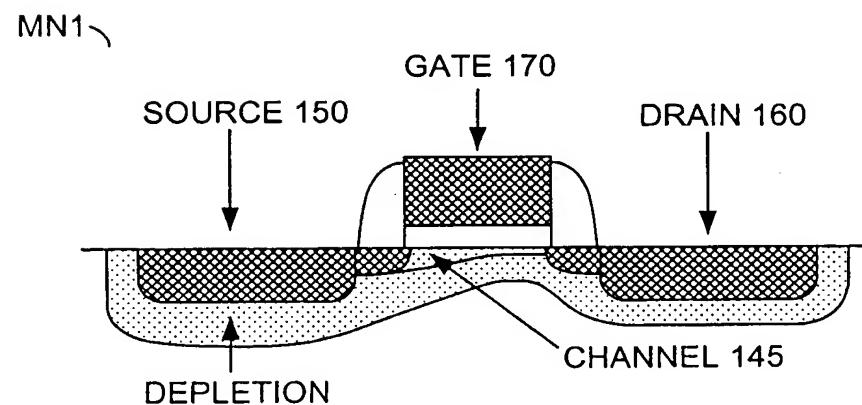


FIG. 6



100

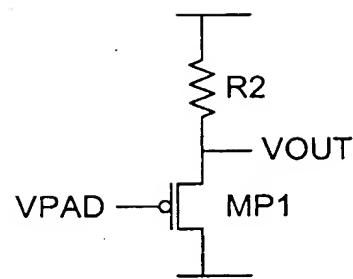


FIG. 7

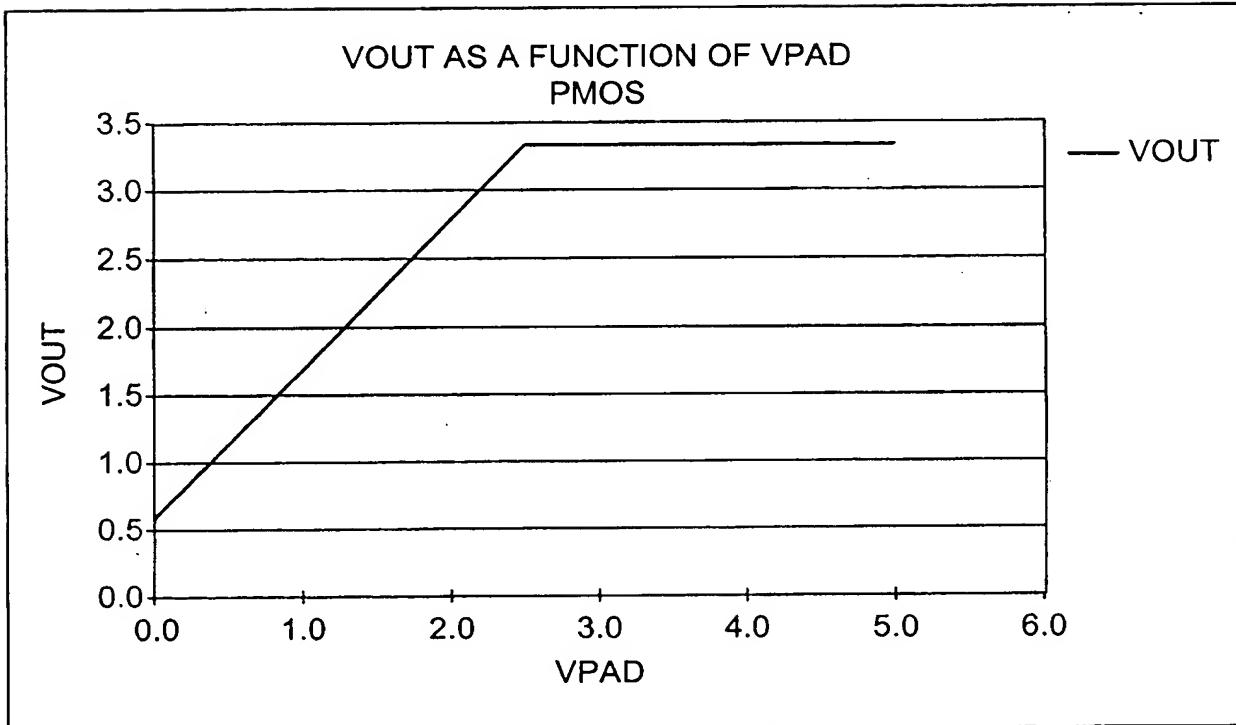


FIG. 8

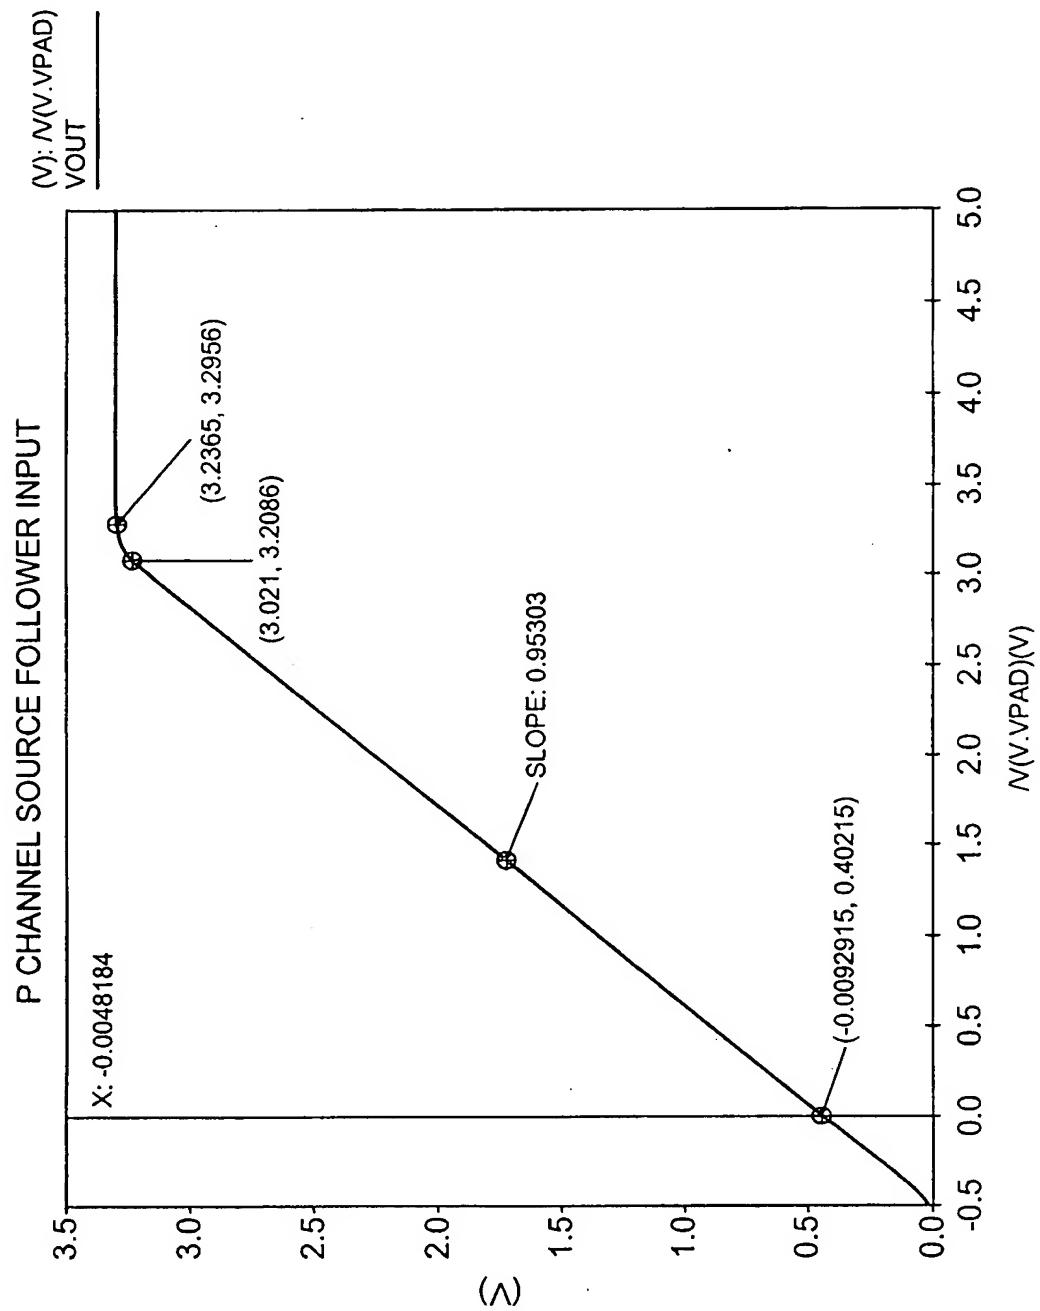


FIG. 9

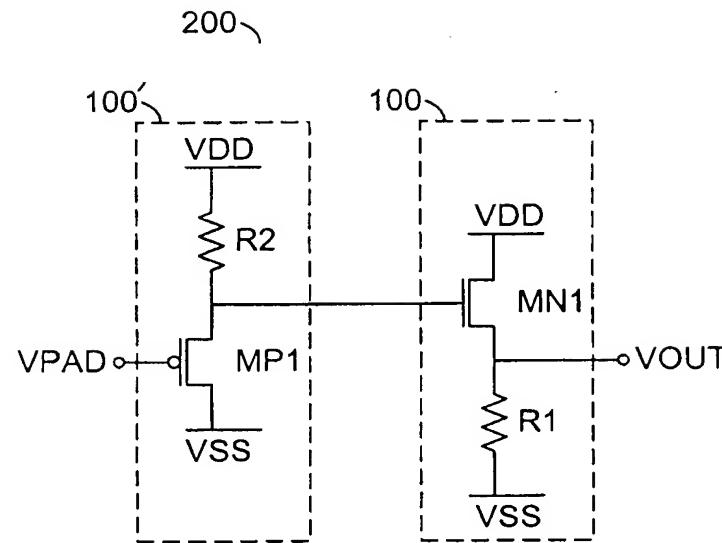


FIG. 10

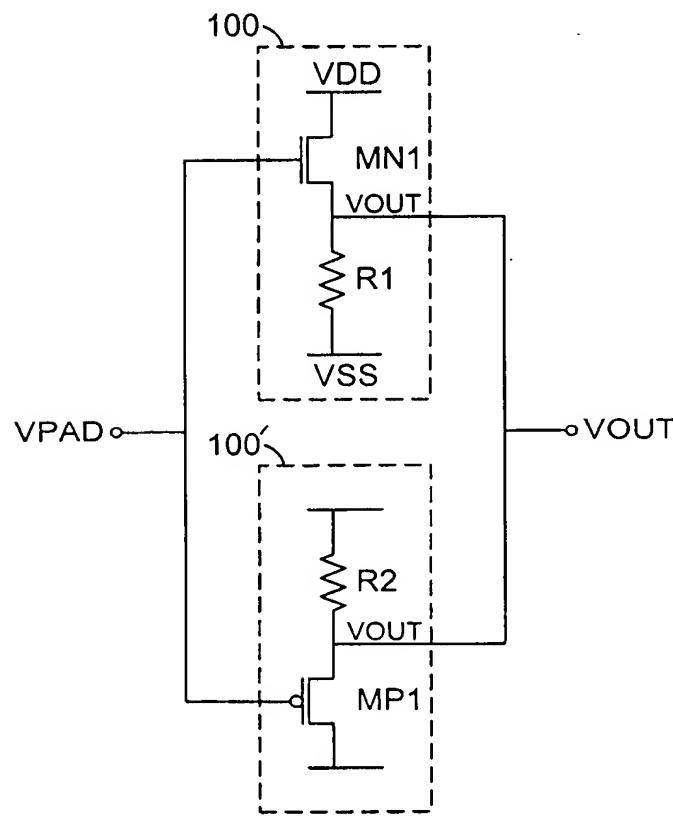


FIG. 12

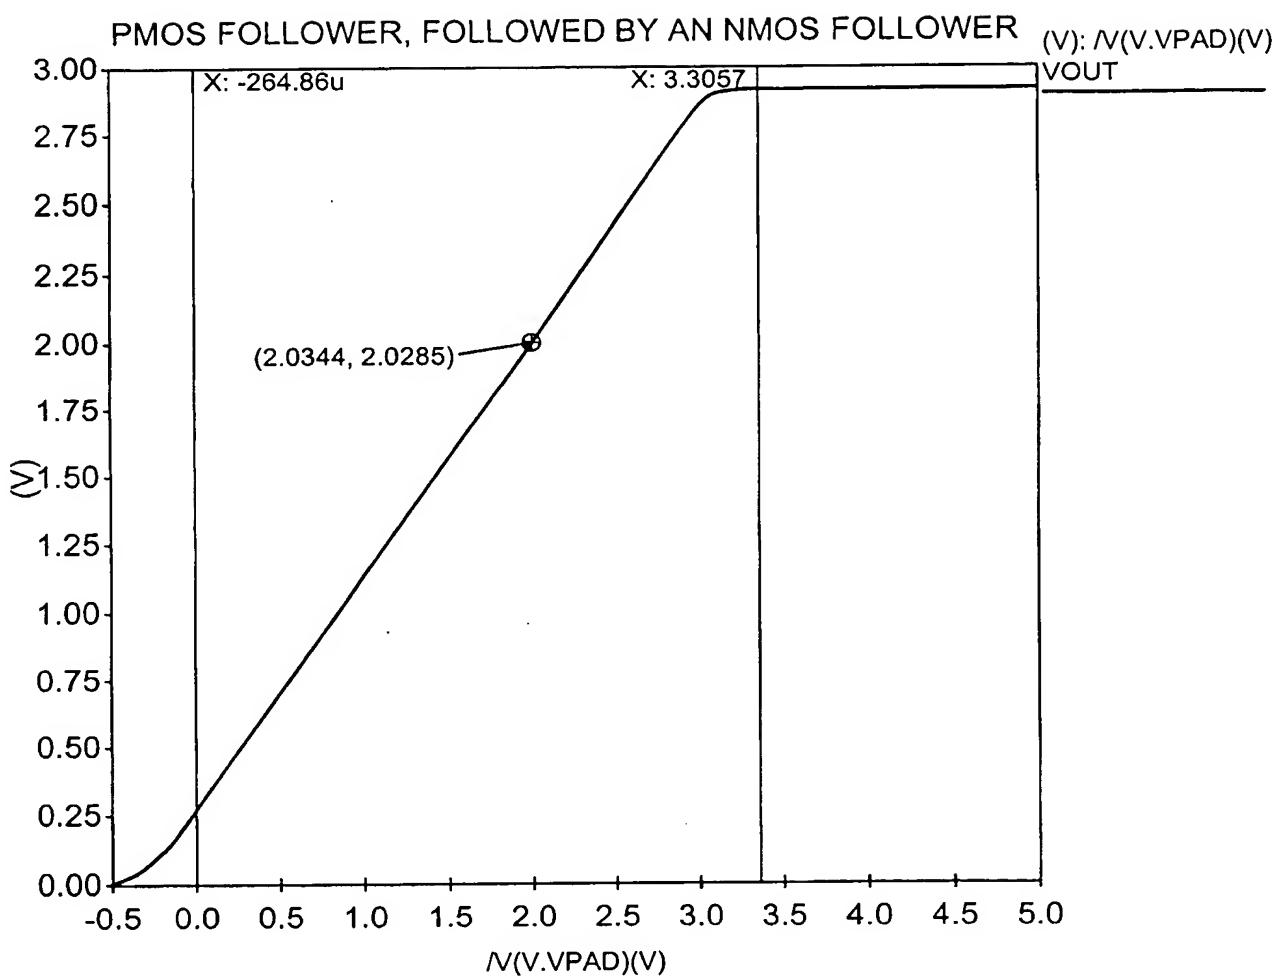


FIG. 11

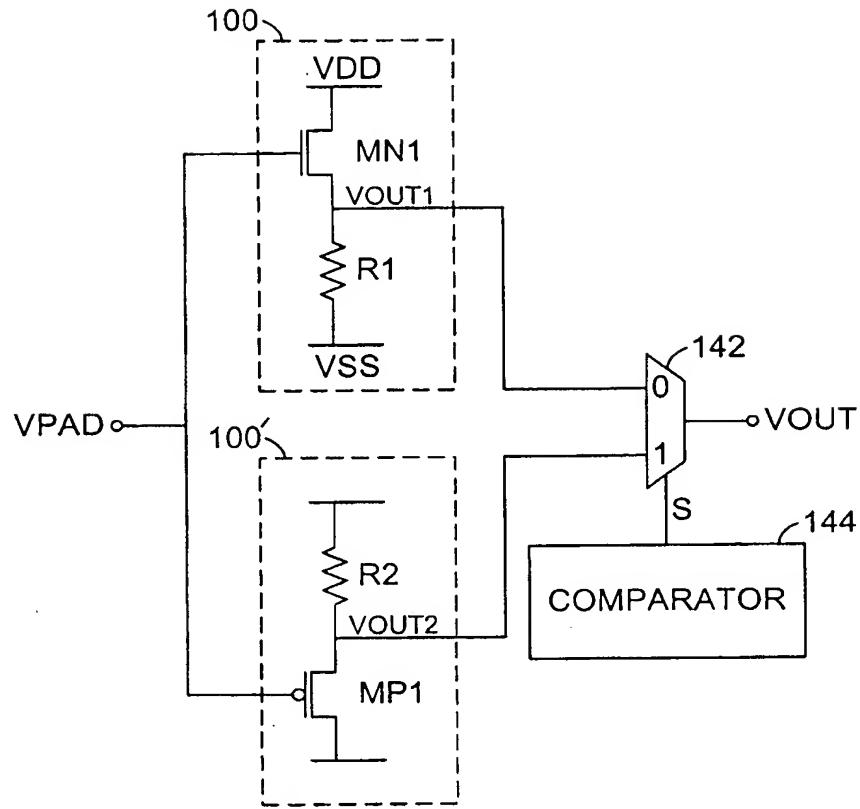


FIG. 13